

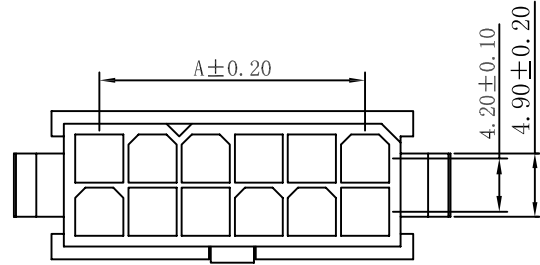
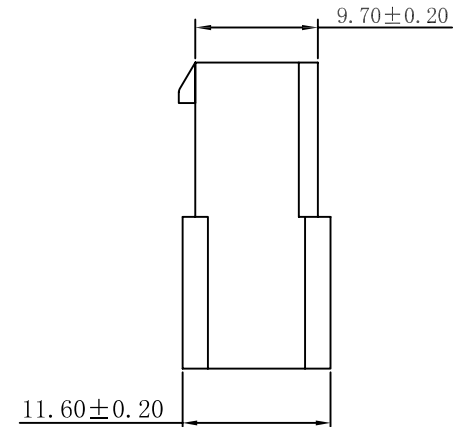
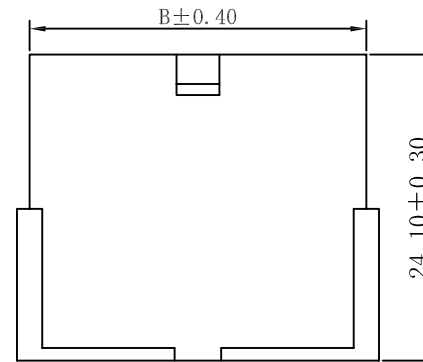
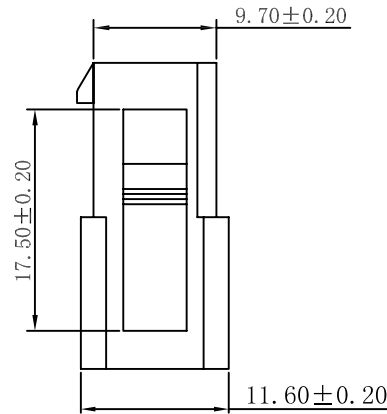


有翅

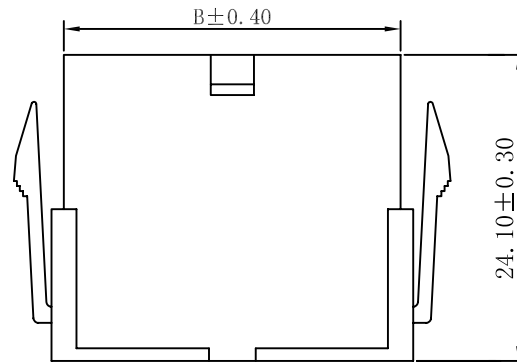

无翅

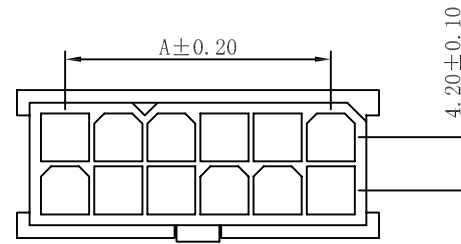


■ SPECIFICATION

- Voltage rating: 250V AC, DC
- Current Rating: 7A, AC, DC
- Withstand voltage: 1500V AC/minute
- Contact resistance: 10mΩ max
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C ~ +85° C

■ HOUSING

- Material: Nylon 66 UL 94V-2

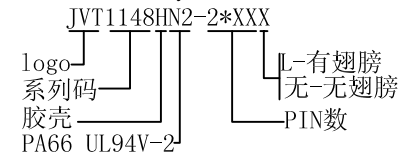

PART NO.	Dimensions (mm)	
	A	B
2*1	--	5.60
2*2	4.20	9.80
2*3	8.40	14.00
2*4	12.60	18.20
2*5	16.80	22.40
2*6	21.00	26.60
2*7	25.20	30.80
2*8	29.40	35.00
2*9	33.60	39.20
2*10	37.80	43.40
2*11	42.00	47.60
2*12	46.20	51.80

GENERAL TOLERANCE	
0	±0.35
.0	±0.30
.00	±0.20
.000	±0.10



乔业电子有限公司

CHYAO YEE CONNECTORS CO., L TD

核准	审核	绘图	品名	MOLEX4.2mm HSG		
	陈宁亮	李勇军	料号	JVT1148HN2-2*XXX		
			图名	044	版本	A

版本	变更内容	日期	单位	mm	比例	1:1	日期	20131224
----	------	----	----	----	----	-----	----	----------

A B C D E F G H