
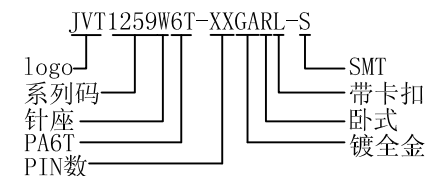
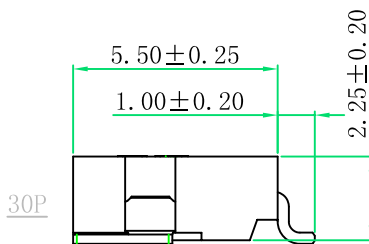

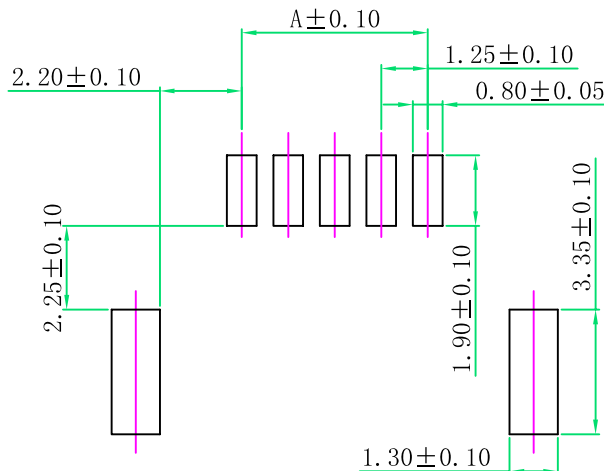
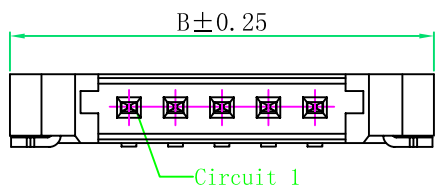


SPECIFICATION

- Voltage rating: 125V AC, DC
- Current Rating: 1A, AC, DC
- Withstand voltage: 500V AC/minute
- Contact resistance: 20mΩ max
- Insulation resistance: 100MΩ min
- Temperature range: -25° C ~ +85° C

WAFER

- Material: Nylon 6T, UL94V-0 Natural (Beige)
- Pin Material: Brass/Gold-plated
- Solder Tabs: Brass/Gold-plated

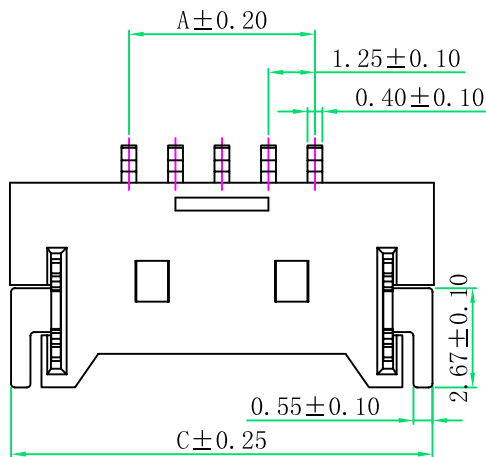

Circuit No.	Dimensions		
	A	B	C
02P	1.25	7.65	7.58
03P	2.50	8.90	8.83
04P	3.75	10.15	10.08
05P	5.00	11.40	11.33
06P	6.25	12.65	12.58
07P	7.50	13.90	13.83
08P	8.75	15.15	15.08
09P	10.00	16.40	16.33
10P	11.25	17.65	17.58
11P	12.50	18.90	18.83
12P	13.75	20.15	20.08
14P	16.25	22.65	22.58
15P	17.50	23.90	23.83
16P	18.75	25.15	25.08
20P	23.75	30.15	30.08
30P	36.25	42.65	42.58

GENERAL TOLERANCE	
0	±0.35
.0	±0.30
.00	±0.20
.000	±0.10

A1		贴板贴片宽度尺寸由0.76±0.10变成0.55±0.10	20150321		乔业电子有限公司 CHYAO YEE CONNECTORS CO., L TD		单位	mm	比例	1:1	日期	20130708
版本	变更内容		日期		日期	20130708						

核准	审核	绘图	品名	MOLEX51146 带扣WAFER		
	bolly	许向毅	料号	JVT1259W6T-XXGARL-S		
			图名	043	版本	A1